


## Installation Guide





1. Remove your old motor print board by drilling out the rivets.

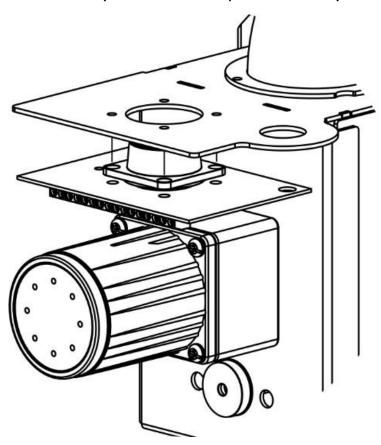

**2.** Check to see if it is a PTC or NTC sensor fitted on your old motor print board.

NTC føler:



PTC føler:




# Installation Guide






**3.** Depending on what kind of sensor was on your old motor print board, install the same type on your <u>new</u> 12 pin motor print.

#### NTC føler:

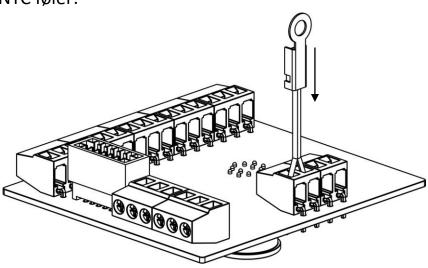

#### PTC føler:

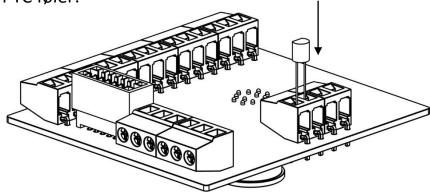


### Installations Guide


### 8-12Pin PTC Motorprint KIT



**4.** Install the supplied bracket on the underside of burner with the



**5.** Secure your new 12 pin motor print to the burner.




## Installation Guide





**6.** Finally, wire the leads of the burner plug to the main print board as shown below:

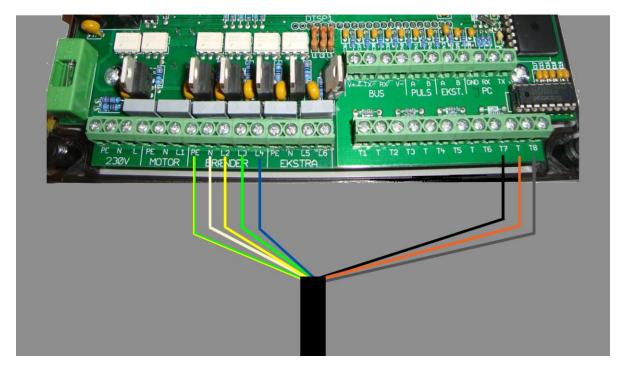

| Color        | Port        |
|--------------|-------------|
| Yellow/Green | PE          |
| White        | N           |
| Yellow       | L2          |
| Green        | L3          |
| Blue         | L4          |
| Black        | Т7          |
| Orange       | Т           |
| Grey         | T8          |
| Light Blue   | Do not use. |
| Red          | Do not use  |
| Purple       | Do not use  |
| Plnk         | Do not use  |