

3 WAY MOTORIZED VALVE FOR WEATHER COMPENSATION




WIRING CONNECTIONS

COMPONENT	WIRE COLOR	INPUTS	OUTPUTS	FUNCTION
10 m NTC Temperature Sensor	Black	T (common)		Indoor or Outdoor temperature reference sensor
	Black	On available input T3-T10		
2.5 m NTC Temperature Sensor	Black	T (common)		Forwarding Temperature Sensor
	Black	On available input T3-T10		
Weather Compensation Valve	Green		PE	Ground
	Black		N	Neutral
	Red		L (On available output L5-L16)	Valve Open
	White		L (On available output L5-L16)	Valve Closed

INSTALLATION DIAGRAM

Under the **WEATHER** menu in the controller, choose the corresponding connected inputs for the forwarding and indoor/outdoor reference temperature sensor as well as the outputs for the opening of the valve (**Regulating Valve Open**) and for the closing of the valve (**Regulating Valve Close**).

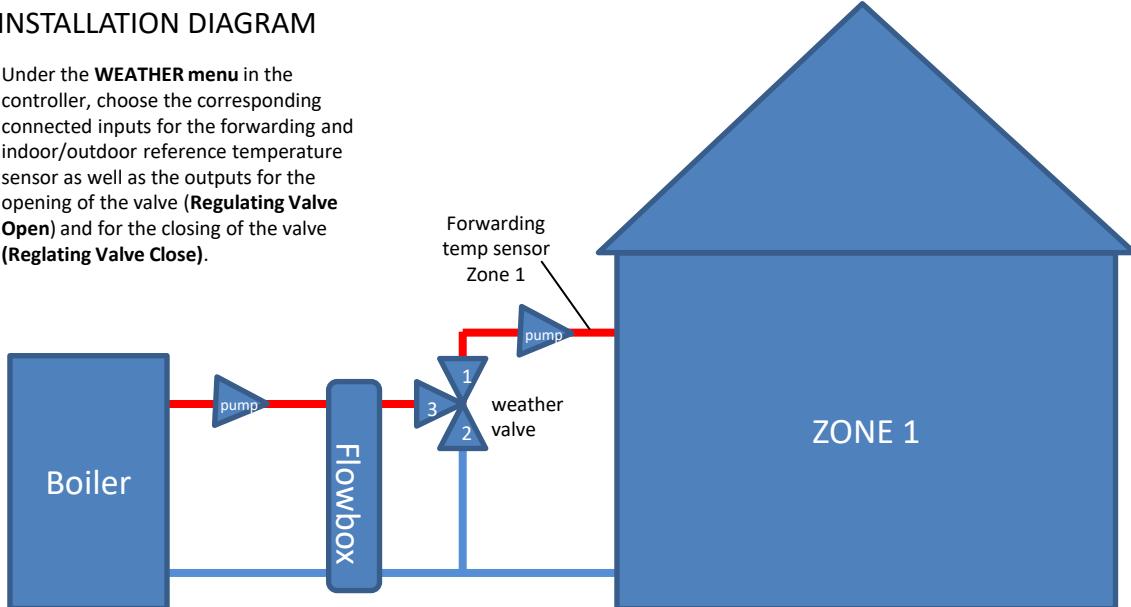

NBE 3-VEJS MOTORVENTIL TIL VEJRKOMPENSERING



TILSLUTNING TIL PRINT

KOMPONENT	WIRE COLOR	INDGANG	UDGANG	FUNKTION
Temperaturføler NTC 10.00m	Black	T		Monteres udendørs, på en nordlig gavl
	Black	vælges en ledig indgang T3-T10		
Temperaturføler NTC 2.50m	Black	T		Monteres i dyklomme i fremløbet til huset
	Black	vælges en ledig indgang T3-T10		
3-vejs motorventil	Green		PE	Jord
	Black		N	Neutral
	Red		L (På hovedprintet vælges en ledig port fra L5-L16)	Ventil åbne
	White		L (På hovedprintet vælges en ledig port fra L5-L16)	Ventil lukke

INSTALLATION

Gå ind under menupunktet "Vejr" og vælg de tilsluttede udgange fra drop down menuen, ud for ventilen (Zone 1 ventil åbne og Zone 1 ventil lukke).

